

# CAR TRANSPORTER

PRICE LIST

**BRIAN JAMES TRAILERS**

» Connected to you



UNITED KINGDOM


# CONTENTS

- 03 CAR HAULER
- 05 C TRANSPORTER
- 06 A TRANSPORTER
- 09 T TRANSPORTER
- 11 RACE SHUTTLE 2 and 3
- 13 RACE SPORT
- 15 UNIVERSAL OPTIONS



# CAR HAULER

## CAR HAULER STANDARD EQUIPMENT



PRODUCT CODE	145-1210	145-3210
<b>CAPACITY</b>		
Gross kg	2,700	2,700
Load kg	2,169	2,131
Unladen trailer weight kg	531	569
<b>DIMENSIONS</b>		
Load bed length m <b>A</b>	4.00	4.90
Load bed width m <b>B</b>	2.00	2.00
Overall trailer length m <b>C</b>	5.58	6.48
Overall trailer width m <b>D</b>	2.44	2.44
Bed load height m (unladen with standard 12" wheels fitted) <b>E</b>	0.43	0.43
Towball height (loaded with standard 12" wheels fitted, centre of towball) m	0.47	0.47
<b>RUNNING GEAR</b>		
Axles	2	2
Wheel / tyre size	12" (155/70)	12" (155/70)
Jockey wheel, serrated type, side clamped, central position	●	●
Steel spare wheel/tyre and carrier, chassis mounted	●	●
<b>REAR LOADING</b>		
Low profile 1.7m loading ramps feature useful lifting handles for easy handling	●	●
<b>EXTERIOR</b>		
Coloured body trim - Jet black	●	●
<b>SECURITY</b>		
Cast steel coupling head + integral high security lock	●	●
<b>TRAILER LIGHTING</b>		
12V LED trailer lighting - front marker lamps, stop, tail, indicators and registration plate (fog and reverse lamps are roundpoint style 12V filament bulb)	●	●
<b>WARRANTY</b>		
5 year extended chassis warranty	●	●
<b>DELIVERY</b>		
Delivery to a UK dealer	●	●
<b>PRICE</b>		
<b>£ ex vat</b>	<b>3,000</b>	<b>3,300</b>

# CAR HAULER


## OPTIONAL EQUIPMENT

WHEELS	£ ex vat
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts	600
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts	750
WINCHES	
Manually operated winch with steel cable, auto-brake mechanism and roller guide	350
OPERATION	
Hydraulic tilt-bed operation for lowest loading angle	670
LOADING OPTIONS	
Lightweight assistor ramps – ultra low loading facility (pair)	150
Rear support stands, side clamped drop down type (for use with non-tilting beds only)	100
STORAGE	
Tyre storage and transport rack - high level rack with securing system and locking cable	540
LOAD RESTRAINT	
Wheel chocks (pair) bolted adjustable positions - lower profile designed for sports cars	100

See page 15 for details of additional security, safety and load restraint options which are available on all of our ranges.

# C TRANSPORTER


## STANDARD EQUIPMENT

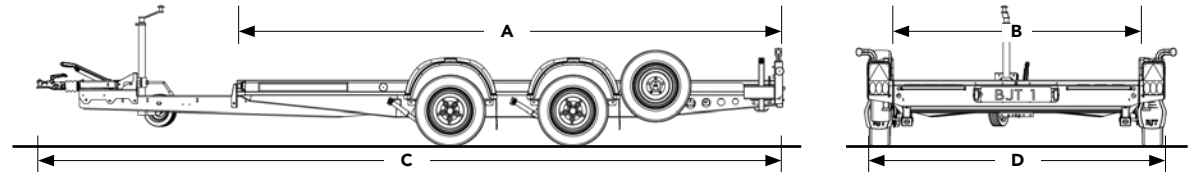

PRODUCT CODE	126-1011	126-1111	126-1211	126-1221	126-2002	126-2012	126-2112	126-2213	126-2223	126-2323	126-2423
<b>CAPACITY</b>											
Gross kg	1,500	1,500	1,500	1,500	2,000	2,000	2,000	2,600	2,600	2,600	2,600
Load kg	1,060	1,010	973	968	1,445	1,425	1,388	1,970	1,955	1,930	1,905
Unladen trailer weight kg	440	490	527	532	555	575	612	630	645	670	695
<b>DIMENSIONS</b>											
Load bed length m <b>A</b>	2.70	3.20	3.70	3.70	3.30	3.30	3.70	4.00	4.00	4.50	5.00
Load bed width m <b>B</b>	1.80	1.80	1.80	2.00	1.70	1.80	1.80	1.80	2.00	2.00	2.00
Overall trailer length m <b>C</b>	4.18	4.68	5.18	5.18	4.72	4.72	5.18	5.48	5.48	5.98	6.48
Overall trailer width m <b>D</b>	2.18	2.18	2.18	2.38	2.08	2.18	2.18	2.18	2.38	2.38	2.38
Bed load height m	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
<b>RUNNING GEAR</b>											
Wheel / tyre size	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)
Axles	1	1	1	1	2	2	2	2	2	2	2
Spare wheel	●	●	●	●	●	●	●	●	●	●	●
Heavy duty telescopic jockey wheel, 48mm, smooth wall	●	●	●	●	—	—	—	—	—	—	—
Heavy duty telescopic jockey wheel, 48mm, serrated wall	—	—	—	—	●	●	●	●	●	●	●
<b>RAMPS</b>											
High grip punched ramps 1.90m <b>E</b>	●	●	●	●	—	—	—	—	—	—	—
High grip punched ramps 2.40m <b>E</b>	—	—	—	—	●	●	●	●	●	●	●
<b>EXTERIOR</b>											
Coloured body trim – Sargasso blue	●	●	●	●	●	●	●	●	●	●	●
Flush fitting centre deck, featuring durable and strong anti-slip deck phenol ply	●	●	●	●	●	●	●	●	●	●	●
<b>SECURITY</b>											
Cast steel coupling head + integral high security lock	●	●	●	●	●	●	●	●	●	●	●
<b>WARRANTY</b>											
5 year extended chassis warranty	●	●	●	●	●	●	●	●	●	●	●
<b>DELIVERY</b>											
Delivery to a UK dealer	●	●	●	●	●	●	●	●	●	●	●
<b>PRICE</b>											
£ ex vat	2,500	2,650	2,850	2,850	3,350	3,350	3,500	3,650	3,650	3,800	4,000

# C TRANSPORTER


## OPTIONAL EQUIPMENT

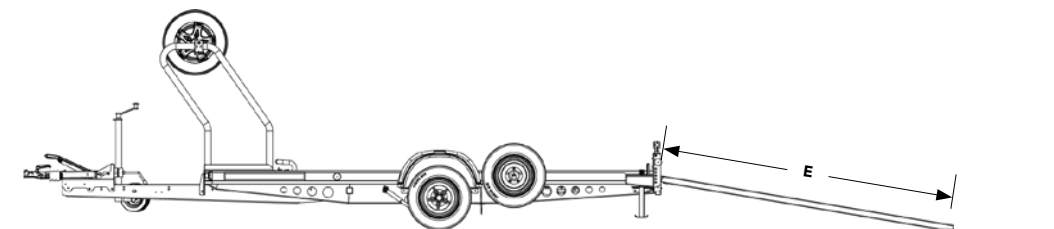

WHEELS	£ ex vat
Alloy wheels – 3x (12" Style B2 - Silver) + safety locking wheel bolts (for single axle models)	360
Alloy wheels – 3x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for single axle models)	450
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts (for twin axle models)	600
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models)	750
WINCHES	
Manually operated winch 2 speed + 3 point adjustable pull position	320
Manually operated winch with steel cable, auto-brake mechanism and multi-point pulley guide	400
12V 4,500lb electric operation winch with steel wire cable, roller fairlead and remote control (note: cannot be fitted in conjunction with storage box) available on twin axle models only	630
Portable power pack for 4,500lb electric winch, with charger and Anderson twin pin plug connector	320
LOADING OPTIONS	
Rear support stands	170
DECKING	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	120
STORAGE	
Fuel can storage box, lockable, twin opening doors for 1, 2 or 3 x 20 litre jerry cans – available in Sargasso blue	230
High level tyre storage and transport rack with securing system and locking cable	540
LOAD RESTRAINT	
Wheel chock, bolted to bed, optional positions - lower profile designed for sports cars	110
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	150

See page 15 for details of additional security, safety and load restraint options which are available on all of our ranges.


## A TRANSPORTER STANDARD EQUIPMENT

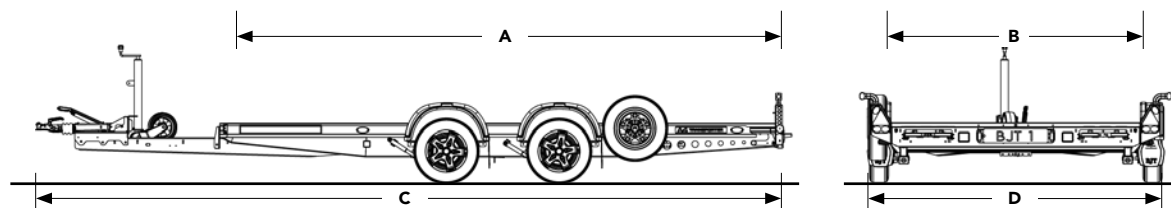

PRODUCT CODE	125-1011	125-1111	125-1211	125-1312	125-2002	125-2112	125-2213	125-2223	125-2323	125-2324	125-2423	125-2424
<b>CAPACITY</b>												
Gross kg	1,500	1,500	1,500	1,500	2,000	2,000	2,600	2,600	2,600	3,000	2,600	3,000
Load kg	1,060	1,010	973	955	1,445	1,388	1,970	1,955	1,930	2,320	1,905	2,295
Unladen trailer weight kg	440	490	527	545	555	612	630	645	670	680	695	705
<b>DIMENSIONS</b>												
Load bed length m A	2.70	3.20	3.70	4.00	3.30	3.70	4.00	4.00	4.50	4.50	5.00	5.00
Load bed width m B	1.80	1.80	1.80	2.00	1.70	1.80	1.80	2.00	2.00	2.00	2.00	2.00
Overall trailer length m C	4.24	4.74	5.24	5.53	4.77	5.24	5.54	5.54	6.04	6.04	6.54	6.54
Overall trailer width m D	2.18	2.18	2.18	2.38	2.08	2.18	2.18	2.38	2.38	2.38	2.38	2.38
Bed load height m	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
<b>RUNNING GEAR</b>												
Wheel / tyre size	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)
Axles	1	1	1	1	2	2	2	2	2	2	2	2
Spare wheel	●	●	●	●	●	●	●	●	●	●	●	●
Heavy duty telescopic jockey wheel, 48mm, serrated wall	●	●	●	●	—	—	—	—	—	—	—	—
Jockey wheel, heavy duty auto-retractable, 60mm	—	—	—	—	●	●	●	●	●	●	●	●
<b>REAR LOADING</b>												
High grip punched, glide out ramps 1.90m E	●	●	●	●	—	—	—	—	—	—	—	—
High grip punched, glide out ramps 2.40m E	—	—	—	—	●	●	●	●	●	●	●	●
Rear stands with foot pedal action, gas spring operation	●	●	●	●	●	●	●	●	●	●	●	●
<b>STORAGE</b>												
Bed locker, front, automatic lift	●	●	●	●	●	●	●	●	●	●	●	●
<b>EXTERIOR</b>												
Body trim – available in Sargasso blue, Poppy red, Arcelor anthracite or Jet black	●	●	●	●	●	●	●	●	●	●	●	●
Flush fitting centre deck, featuring durable and strong anti-slip deck phenol ply	●	●	●	●	●	●	●	●	●	●	●	●
<b>SECURITY</b>												
Cast steel coupling head + integral high security lock	●	●	●	●	●	●	●	●	●	●	●	●
<b>WARRANTY</b>												
5 year extended chassis warranty	●	●	●	●	●	●	●	●	●	●	●	●
<b>DELIVERY</b>												
Delivery to a UK dealer	●	●	●	●	●	●	●	●	●	●	●	●
<b>PRICE</b>												
£ ex vat	3,100	3,300	3,550	3,600	4,050	4,200	4,400	4,400	4,550	4,750	4,650	4,900

# A TRANSPORTER

## OPTIONAL EQUIPMENT

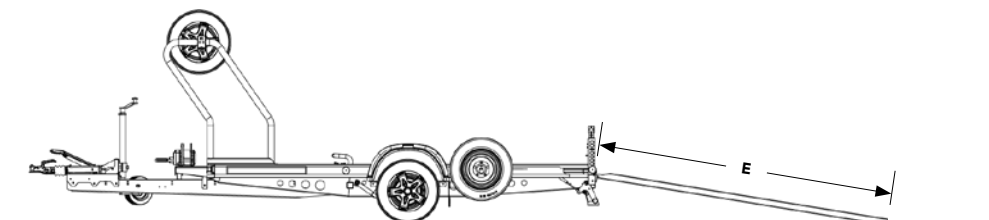


WHEELS	£ ex vat
Alloy wheels – 3x (12" Style B2 - Silver) + safety locking wheel bolts <b>(for single axle models)</b>	360
Alloy wheels – 3x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts <b>(for single axle models)</b>	450
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts <b>(for twin axle models)</b>	600
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts <b>(for twin axle models)</b>	750
WINCHES	
Manually operated winch 2 speed + 3 point adjustable pull position	320
Manually operated winch with steel cable, auto-brake mechanism and multi-point pulley guide	400
12V 4,500lb electric operation winch with steel wire cable, roller fairlead and remote control <b>(note: cannot be fitted in conjunction with storage box) available on twin axle models only</b>	630
Portable power pack for 4,500lb electric winch, with charger and Anderson twin pin plug connector	320
DECKING	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	120
STORAGE	
Fuel can storage box, lockable, twin opening doors for 1, 2 or 3 x 20 litre jerry cans – available in Sargasso blue, Poppy red, Arcelor anthracite or Jet black	230
High level tyre storage and transport rack with securing system and locking cable	540
LOAD RESTRAINT	
Wheel chock, bolted to bed, optional positions - lower profile designed for sports cars	110
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	150

See page 15 for details of additional security, safety and load restraint options which are available on all of our ranges.



# T TRANSPORTER

## T TRANSPORTER STANDARD EQUIPMENT



MODEL PREFIX	231	231	231	231	231	231	231	231	231	231	231	231	231	231	231
MODEL NUMBER	5021-35-2-12	5021-35-3-10	5021-35-3-12	5022-35-2-12	5022-35-3-10	5022-35-3-12	5521-35-2-12	5521-35-3-10	5521-35-3-12	5522-35-2-12	5522-35-3-10	5522-35-3-12	5523-35-3-12	6022-35-3-12	6023-35-3-12
<b>CAPACITY / DIMENSIONS</b>															
Gross kg	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500
Load kg	2,600	2,540	2,535	2,580	2,530	2,525	2,570	2,515	2,510	2,545	2,485	2,475	2,450	2,450	2,420
Unladen trailer weight kg	900	960	965	920	970	975	930	985	990	955	1,015	1,025	1,050	1,050	1,080
Load bed length m A	5.00	5.00	5.00	5.00	5.00	5.00	5.50	5.50	5.50	5.50	5.50	5.50	5.50	6.00	6.00
Load bed width m B	2.10	2.10	2.10	2.24	2.24	2.24	2.10	2.10	2.10	2.24	2.24	2.24	2.38	2.24	2.38
Overall trailer length m C	6.60	6.60	6.60	6.60	6.60	6.60	7.10	7.10	7.10	7.10	7.10	7.10	7.10	7.60	7.60
Overall trailer width m D	2.18	2.18	2.18	2.32	2.32	2.32	2.18	2.18	2.18	2.32	2.32	2.32	2.46	2.32	2.46
Bed load height m E	0.65	0.59	0.65	0.65	0.59	0.65	0.65	0.59	0.65	0.65	0.59	0.65	0.65	0.65	0.65
Tow-ball height (loaded) m F	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39
<b>RUNNING GEAR</b>															
Axles	2	3	3	2	3	3	2	3	3	2	3	3	3	3	3
Wheel / tyre size	12" (195/60)	10" (195/55)	12" (195/60)	12" (195/60)	10" (195/55)	12" (195/60)	12" (195/60)	10" (195/55)	12" (195/60)	12" (195/60)	10" (195/55)	12" (195/60)	12" (195/60)	12" (195/60)	12" (195/60)
Spare wheel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heavy duty telescopic jockey wheel, 48mm, serrated wall with 'Turn-Lok'	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>EXTERIOR</b>															
Body trim - Red, Blue, Anthracite, Black, Yellow	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Side rails (can be supplied without FOC)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>LOADING</b>															
1.8m rear ramps	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>STORAGE</b>															
Storage box, central bed location	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>LIGHTING / SECURITY</b>															
LED lighting all round	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast steel coupling head + integral high security lock	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>WARRANTY</b>															
5 year extended chassis warranty	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>DELIVERY</b>															
Delivery to a UK dealer	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>PRICE</b>															
£ ex vat	5,550	6,300	6,350	6,000	6,650	6,700	6,000	6,750	6,800	6,400	7,100	7,200	7,700	7,700	8,100

# T TRANSPORTER


## OPTIONAL EQUIPMENT

WHEELS	£ ex vat
Alloy wheels – 5x (12" Style B2 - Silver, 5.5J) + safety locking wheel bolts (for twin axle models)	600
Alloy wheels – 5x (12" Style B2, 5.5J- Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models)	750
Alloy wheels – 7x (10" Style B2 - Silver) + safety locking wheel bolts (for tri-axle models)	840
Alloy wheels – 7x (10" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for tri-axle models)	1,050
Alloy wheels – 7x (12" Style B2 - Silver, 5.5J) + safety locking wheel bolts (for tri-axle models)	840
Alloy wheels – 7x (12" Style B2, 5.5J- Anthracite, diamond cut) + safety locking wheel bolts (for tri-axle models)	1,050
WINCHES	
Manual winch kit, auto-braked + free spool - Includes central pulley system - not compatible with cross over loading ramps	390
Electric winch kit - Warrior 8000 - 8000 lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack)	870
Electric winch kit - Warn 8000 - 8000 lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack)	1,080
Power pack, portable HD 12V for electric winch - supplied with quick coupling Anderson connectors	320
OPERATION	
Manual hydraulic tilt-bed operation	640
Electric tilt-bed operation (must be ordered in conjunction with on-board battery kit, see next line)	980
On-board battery kit (can power electric winch or electric hydraulics, or both)	330
C-TEK battery charger kit (must be ordered in conjunction with on-board battery kit)	270
OPTION PACKS	
Electric assistance pack (Warrior winch) - includes electric tilt-bed, battery pack, electric winch, CTEK charger	1,950
Electric assistance pack (Warn winch) - includes electric tilt-bed, battery pack, electric winch, CTEK charger	2,100
LOADING OPTIONS	
Rear ramp upgrade, 2.3m	80
Full-width tail panel upgrade	80
Front cross-over loading ramps, 1.8m	360
Lightweight assistor ramps (pair) – ultra low loading facility (not compatible with front loading ramps due to the shared storage location unless supplied loose and stored in the towing vehicle)	350
Swivel jockey mounting kit, required for cross over loading operation	230
Rear support stands with kick down operation	160
DECKING	
Deck slick pads x4, (red) - protect soft compound racing tyres from the punched deck	120
SIDE OPTIONS	
Headboard, removable (available in all bodywork colours, see previous page)	200
STORAGE	
High level tyre storage and transport rack with securing system and locking cable	540
LOAD RESTRAINT	
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	150
Wheel chocks - low profile, pair, quick release and fully adjustable, professional system engages into trailer chassis	110

See page 15 for details of additional security, safety and load restraint options which are available on all of our ranges.

# RACE SHUTTLE

## RACE SHUTTLE 2 & 3 STANDARD EQUIPMENT

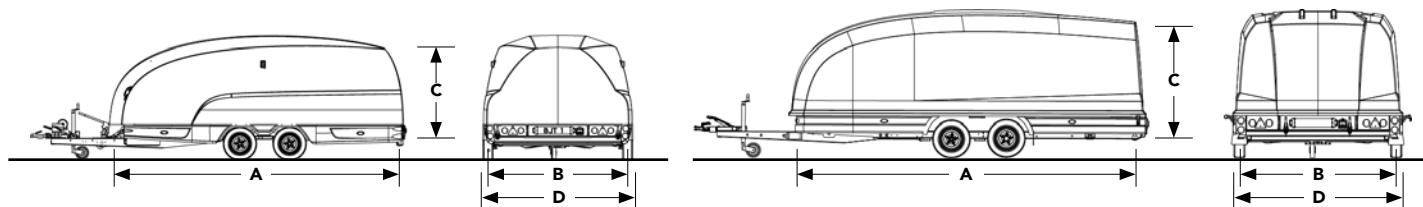

MODEL	RACE SHUTTLE 2		RACE SHUTTLE 3		
	300-1010	300-1011	330-1010	330-1011	330-1021
PRODUCT CODE					
CAPACITY					
Gross kg	2,600	2,600	2,600	2,600	3,000
Load kg	1,785	1,765	1,690	1,670	2,070
Unladen trailer weight kg	815	835	910	930	930
DIMENSIONS					
Load bed length m A	4.30	4.30	4.70	4.70	4.70
Load bed width m B	1.95	1.95	1.95	1.95	1.95
Overall trailer length m	5.82	5.82	6.20	6.20	6.20
Internal height m C	1.53	1.53	1.60	1.60	1.60
Overall trailer width m D	2.30	2.30	2.30	2.30	2.30
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40
OPERATION					
Fixed bed	●	—	●	—	—
Hydraulic tilt-bed	—	●	—	●	●
Spare wheel	●	●	●	●	●
REAR LOADING					
Loading ramps 2.40m	●	●	●	●	●
SECURITY					
Cast steel coupling head + integral high security lock	●	●	●	●	●
STORAGE					
Storage pockets in sides	—	—	●	●	●
EXTERIOR					
Dark grey lower bodywork	●	●	●	●	●
White high gloss GRP upper body	●	●	●	●	●
INTERIOR					
LED illumination. Background lighting.	●	●	●	●	●
WARRANTY					
5 year extended chassis warranty	●	●	●	●	●
DELIVERY					
Delivery to a UK dealer	●	●	●	●	●
PRICE					
£ ex vat	9,450	10,150	10,900	11,600	12,000


# RACE SHUTTLE 2 & 3

## OPTIONAL EQUIPMENT

WHEELS	£ ex vat
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts	600
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts	750
WINCHES	
Manual winch 2 speed, steel cable and roller guide	350
Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control (no power system)	630
Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control (includes portable power pack)	930
STORAGE	
Tyre rack + fuel storage station (check suitability for saloon car transportation as clearance under rack is reduced)	670
LOAD RESTRAINT	
Adjustable wheel stop bar – quick release	180

See page 15 for details of additional security, safety and load restraint options which are available on all of our ranges.

## RACE SPORT STANDARD EQUIPMENT

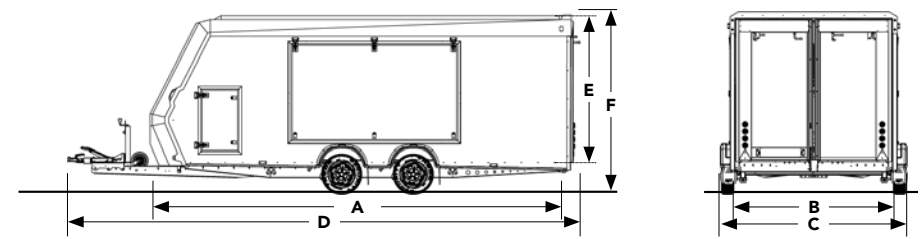

PRODUCT CODE	340-4500	340-4510	340-5000	340-5010	340-5510
<b>CAPACITY</b>					
Gross kg	2,600	3,000	2,600	3,000	3,000
Load kg	1,580	1,930	1,510	1,900	1,820
Unladen trailer weight kg	1,020	1,070	1,090	1,100	1,180
<b>DIMENSIONS</b>					
Load bed length m A	4.50	4.50	5.00	5.00	5.50
Load bed width m B	2.00	2.00	2.00	2.00	2.10
Overall trailer width m C	2.38	2.38	2.38	2.38	2.48
Overall length m D	6.06	6.06	6.56	6.56	7.06
Internal height (min aperture) m	1.77	1.77	1.77	1.77	1.77
Internal height (to roof) m E	1.82	1.82	1.82	1.82	1.82
Overall trailer height m F	2.25	2.25	2.25	2.25	2.25
Tow-ball height (loaded) m	0.40	0.40	0.40	0.40	0.40
<b>RUNNING GEAR</b>					
Axles	2	2	2	2	2
Wheel / tyre size	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)
Spare wheel	●	●	●	●	●
<b>STANDARD FEATURES</b>					
Rear support legs	●	●	●	●	●
Front access hatch, left and right (Dimensions <b>4.5m</b> and <b>5.0m</b> = 0.85m (H) x 0.5m (W), <b>5.5m</b> = 1.25m (H) x 0.5m (W))	●	●	●	●	●
'Gullwing' side doors, left and right	●	●	●	●	●
Twin rear door/ramps with fold-out assistor ramps	●	●	●	●	●
Centre storage tray	—	—	—	—	●
Daylight roof, full length	●	●	●	●	●
Punched hi-grip deck left and right	●	●	●	●	●
Front work shelf	●	●	●	●	●
Jockey wheel, auto retractable – HD Al-ko	●	●	●	●	●
<b>SECURITY</b>					
Cast steel coupling head + integral high security lock	●	●	●	●	●
<b>WARRANTY</b>					
5 year extended chassis warranty	●	●	●	●	●
<b>DELIVERY</b>					
Delivery to a UK dealer	●	●	●	●	●
<b>PRICE</b>					
£ ex vat	11,000	11,650	11,200	11,800	12,950

# RACE SPORT

## OPTIONAL EQUIPMENT

	£ ex vat
<b>WHEELS</b>	
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts	600
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts	750
<b>WINCHES</b>	
Electric winch, 12V operation with steel wire cable, roller fairlead and cable connected remote control - on-board battery	480
<b>LOADING OPTIONS</b>	
1.5m Assistor Ramp upgrade	220
<b>DECKING</b>	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	120
<b>LIGHTING</b>	
LED Lighting kit - rear lights, check compatibility of towing vehicle electrics with trailer LED lamps (indicators)	290
<b>STORAGE</b>	
Tyre storage and transport rack - high level rack with securing system	400
Front storage - for 20 litre jerry can x 2 + shelves	170
Aluminium side storage racks	290
Aluminium lid kit for centre tray (available on 340-5510 model only)	260
<b>INTERIOR</b>	
Interior light pack, x4 LED Mini strips, centrally mounted overhead	330
<b>LOAD RESTRAINT</b>	
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	150
Wheel chock loading assist, full-width wheel chock	100

See page 15 for details of additional security, safety and load restraint options which are available on all of our ranges.

# UNIVERSAL OPTIONS

LOAD RESTRAINT	£ ex vat
Tie-down straps - blue, set of 4 x wheel 'sling' straps, 2000 daN/Kg	170
Tie-down straps - orange, set of 4 x wheel 'sling' straps, 4000 daN/Kg	190
Tie-down straps - red, set of 4 x wheel circumference straps, 3000 daN/Kg (not suitable for Race Shuttle models)	210
SAFETY	
Tyre pressure monitoring system – TPMS by TyrePal in-car monitoring with external sensors (*pricing shown for 1 axle/2 axle/3 axle)	190/260/330*
SECURITY	
Datatag kit, provides an asset database registered transponder	150
Lockfast bar kit, 2 point fixing for 10" wheels (not suitable for alloy wheels)	210
Lockfast bar kit, 2 point fixing for 12" wheels (not suitable for alloy wheels)	260

**BRIAN JAMES TRAILERS**

» Connected to you



## NOTES

All images used are for illustrative purposes only and may show non-standard equipment and finishes. All products are subject to change without prior notice due to our continuous development programme.

© BRIAN JAMES TRAILERS LIMITED

Edition 2022Q3-CTUK-PL02

**Brian James Trailers Limited.**  
Sopwith Way, Drayton Fields Industrial Estate  
Daventry, Northampton, NN11 8PB

**T + 44 (0)1327 308 833**

For more information please call or visit our website

**[www.brianjamestrailers.co.uk](http://www.brianjamestrailers.co.uk)**