

PLANT & GENERAL PURPOSE TRAILERS

PRICE LIST

BRIAN JAMES TRAILERS


» Connected to you



UNITED KINGDOM


CONTENTS

- 03 GENERAL PLANT
- 05 DIGGER PLANT
- 07 UNIVERSAL OPTIONS



GENERAL PLANT

STANDARD EQUIPMENT

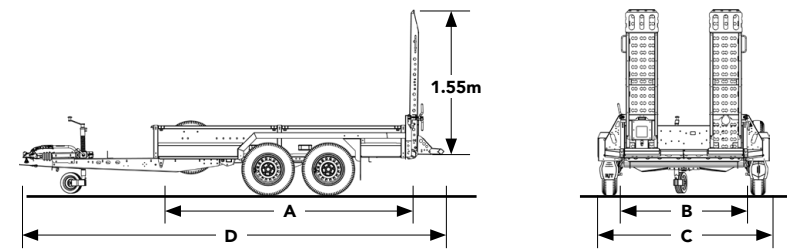

PRODUCT CODE	551-2713-27-2-13	551-2716-27-2-13	551-3116-27-2-13	551-3117-35-2-13	551-3617-35-2-13	551-3618-35-3-12	551-4017-35-2-13	551-4018-35-3-12
CAPACITY								
Gross kg	2,700	2,700	2,700	3,500	3,500	3,500	3,500	3,500
Load kg	2,117	2,080	2,040	2,770	2,721	2,650	2,702	2,627
Unladen trailer weight kg	583	620	660	730	779	850	798	873
DIMENSIONS								
Load bed length m A	2.70	2.70	3.10	3.10	3.60	3.60	4.00	4.00
Internal bed width m B	1.30	1.60	1.60	1.70	1.70	1.80	1.70	1.80
Overall trailer width m C	1.90	2.21	2.21	2.30	2.30	2.40	2.30	2.40
Overall trailer length m D	4.39	4.39	4.79	4.79	5.29	5.29	5.69	5.69
Bed load height m	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.48
RUNNING GEAR								
Axles	2	2	2	2	2	3	2	3
Wheel / tyre size	13" (165/80)	13" (165/80)	13" (165/80)	13" (185/70)	13" (185/70)	12" (195/60)	13" (185/70)	12" (195/60)
Spare wheel	●	●	●	●	●	●	●	●
Auto retract jockey wheel, 48mm, serrated wall	●	●	●	—	—	—	—	—
Heavy duty telescopic jockey wheel, 48mm, serrated wall	—	—	—	●	●	●	●	●
LOADING AND SECURITY								
Coupling head with integral high security lock	●	●	●	●	●	●	●	●
Tie-down anchor points (internal)	●	●	●	●	●	●	●	●
LIGHTING								
LED lighting all round	●	●	●	●	●	●	●	●
EXTERIOR								
Coloured body trim - red, blue, anthracite, black or yellow	●	●	●	●	●	●	●	●
DELIVERY								
Delivery to a UK dealer	●	●	●	●	●	●	●	●
PRICE								
£ ex vat	3,600	3,850	4,100	4,550	4,800	5,250	5,050	5,500

GENERAL PLANT

OPTIONAL EQUIPMENT


	£ ex vat			
	BED LENGTH M			
WINCHES	2.70	3.10	3.60	4.00
Manually operated winch with steel cable, auto braked operation with free spool and centre pulley guide			400	
Electric winch, 4500 lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack)			660	
Power pack, portable HD 12V for electric winch - supplied with quick coupling Anderson connectors			320	
DECKING				
Aluminium deck overlay 1.30m bed width, 3-bar fine checker - protects the surface beneath from high impact loads	320	—	—	—
Aluminium deck overlay 1.60m bed width, 3-bar fine checker - protects the surface beneath from high impact loads	320	360	—	—
Aluminium deck overlay 1.70m bed width, 3-bar fine checker - protects the surface beneath from high impact loads	—	360	400	440
Aluminium deck overlay 1.80m bed width, 3-bar fine checker - protects the surface beneath from high impact loads	—	—	400	440
Super-Grip panels x2	260	280	300	320
Super-Grip panels x3	390	420	450	480
Super-Grip panels x4	520	560	600	640
LOAD RESTRAINT				
Machine stop bar - always load your machine right up to the same location. A safe and convenient part of the chassis to tie against			130	
TracStrap system - 2,500 daN straps x2 fit over tracks to secure machinery - very secure and fast operation			450	
Digger arm lock, fastens digger arm to trailer for ultimate towing security			360	
Digger bucket rest			130	
SIDE OPTIONS				
Side extensions 1.30m width (increases side height by 0.66m)	720	—	—	—
Side extensions 1.60m width (increases side height by 0.66m)	730	770	—	—
Side extensions 1.70m width (increases side height by 0.66m)	—	770	810	850
Side extensions 1.80m width (increases side height by 0.66m)	—	—	820	860
Small side extensions 1.30m width - trim available in red, blue, anthracite, black, yellow or plain steel (increases side height by 0.31m)	650	—	—	—
Small side extensions 1.60m width - trim available in red, blue, anthracite, black, yellow or plain steel (increases side height by 0.31m)	670	690	—	—
Small side extensions 1.70m width - trim available in red, blue, anthracite, black, yellow or plain steel (increases side height by 0.31m)	—	710	750	790
Small side extensions 1.80m width - trim available in red, blue, anthracite, black, yellow or plain steel (increases side height by 0.31m)	—	—	770	810
STORAGE AND SAFETY				
Side storage box x1 (suitable for 2 x heavy duty straps)			140	
Side storage box x2 (suitable for 4 x heavy duty straps)			280	
Chapter 8 chevrons, fitted on rear face of vertical loading ramps - site regulation compliant			200	
	BED WIDTH M			
REAR LOADING - FIXED BED TRAILERS	1.30	1.60	1.70	1.80
Loading ramps 1.62m, fully adjustable, HD hinge, nylon bush and HD clamp mechanism	●	●	●	●
Twin ramp tail panel 1.62m length with spring assistance	150	170	180	190
Heavy duty full width punched tail panel 1.50m length with spring assistance	230	240	250	260
General purpose full width alu / mesh tail panel 1.30m length with spring assistance	230	250	260	270
REAR LOADING - TILT-BED TRAILERS				
Hydraulic tilt-bed with short adjustable ramps 0.95m length			350	
Additional centre ramp 0.95m length			90	
Hydraulic tilt-bed with short twin ramp tail panel 0.95m length with spring assistance	440	460	470	480
Hydraulic tilt-bed with short heavy duty full width punched tail panel 0.93m length with spring assistance	530	540	550	560
LADDER RACKS				
Ladder rack featuring a cross bar and removable posts - suitable for trailers without side extensions fitted	190	200	200	200
Ladder rack featuring a cross bar - suitable for trailers with side extensions fitted	110	120	120	120

See page 7 for details of additional security, safety and load restraint options which are available on all of our ranges.

● Standard — Not available

DIGGER PLANT

STANDARD EQUIPMENT

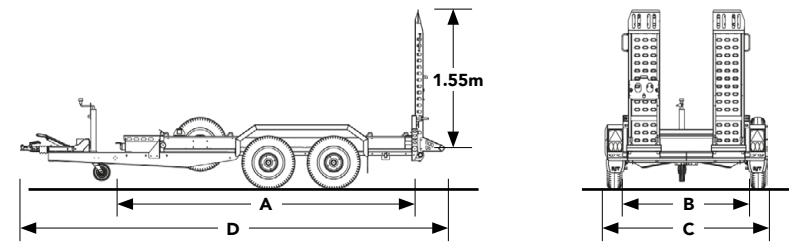

PRODUCT CODE	543-0110	543-1320	543-2320
CAPACITY			
Gross kg	2,700	3,500	3,500
Load kg	2,158	2,818	2,773
Unladen trailer weight kg	542	682	727
DIMENSIONS			
Load bed length m A	2.80	3.20	3.70
Internal bed width m B	1.30	1.70	1.70
Overall trailer width m C	1.79	2.32	2.32
Overall trailer length m D	4.65	5.12	5.62
Bed load height m	0.38	0.39	0.39
Towball height (loaded, centre of towball) m	0.40	0.40	0.40
Working load angle	13°	14°	14°
RUNNING GEAR			
Axles	2	2	2
Wheel / tyre size	13" (165 6pr)	12" (195/60)	12" (195/60)
Sealed wheel bearings	●	●	●
Spare wheel + tyre mounted on side location bracket	●	●	●
LOADING AND SECURITY			
Cast steel coupling head with integral high security lock	●	●	●
Digger bucket rest	●	●	●
Tie-down anchor points (internal)	Multiple in platform		
LIGHTING			
LED lighting all round	●	●	●
DELIVERY			
Delivery to a UK dealer	●	●	●
PRICE			
£ ex vat	3,350	4,300	4,550

DIGGER PLANT

OPTIONAL EQUIPMENT

WINCHES	£ ex vat
Manually operated winch with steel cable, auto braked operation with free spool and pulley guide	400
Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack)	660
Power pack, portable HD 12V for electric winch - supplied with quick coupling Anderson connectors	320
OPERATION	
Eye coupling, 40mm diameter	100
REAR LOADING	
Loading ramps 1.62m, fully adjustable, HD hinge, nylon bush and HD clamp mechanism	●
Twin ramp tail panel 1.30m bed width, 1.62m with spring assistance	150
Twin ramp tail panel 1.70m bed width, 1.62m with spring assistance	180
Heavy duty full width punched tail panel 1.30m bed width, 1.50m with spring assistance	230
Heavy duty full width punched tail panel 1.70m bed width, 1.50m with spring assistance	250
LOAD RESTRAINT	
Bucket locker, secure loose buckets on deck with absolute confidence	400
Machine stop bar - always load your machine right up to the same location. A safe and convenient part of the chassis to tie against	130
TracStrap system - 2,500 daN straps x2 fit over tracks to secure machinery - very secure and fast operation	450
TracStrap system - 5,000 daN heavy duty straps x2 fit over tracks to secure machinery - very secure and fast operation	550
Digger arm lock, fastens digger arm to trailer for ultimate towing security	360
SAFETY	
Chapter 8 chevrons, fitted on rear face of vertical loading ramps - site regulation compliant	200

See page 7 for details of additional security, safety and load restraint options which are available on all of our ranges.

UNIVERSAL OPTIONS

LOAD RESTRAINT	£ ex vat
4 x Wheel Straps, 3 metre x 50mm, HD Orange, 4000 daN/Kg	190
4 x Wheel Straps, 6 metre x 50mm, HD Orange, 4000 daN/Kg	220
4 x Wheel Straps, 10 metre x 50mm, HD Orange, 4000 daN/Kg	290
SAFETY	
Tyre pressure monitoring system – TPMS by TyrePal in-car monitoring with external sensors (*pricing shown for 1 axle/2 axle/3 axle)	190/260/330*
Wheel nut indicators + safety system (4 wheel kit)	15
Wheel nut indicators + safety system (6 wheel kit)	22.50
SECURITY	
Datatag kit, provides an asset database registered transponder	150
Lockfast Bar Kit, 2 point fixing for 12" 5x stud and 13" 165/80 wheels (not suitable for alloy wheels)	300

BRIAN JAMES TRAILERS

» Connected to you



NOTES

All images used are for illustrative purposes only and may show non-standard equipment and finishes. All products are subject to change without prior notice due to our continuous development programme.

© BRIAN JAMES TRAILERS LIMITED

Brian James Trailers Limited.
Sopwith Way, Drayton Fields Industrial Estate
Daventry, Northampton, NN11 8PB

T + 44 (0)1327 308 833

For more information please call or visit our website

www.brianjamestrailers.co.uk